



Features

- **Conductor:** 23 AWG, solid copper wires
- **Outer Jacket:** Polyvinyl chloride
- **Standard:**
ISO/IEC 11801, ANSI/TIA- 568-C2, UL444,
- **LSZH is available , Armour version available**
- **Application :**
Data communications, Local area networks, Building signaling systems
- **ISO9001 Certified Manufacturing Plant**

Category 6 UTP Cable C6USG



Armour Available


Specifications

Specification

General	Operating Temperature Range	-20°C ~ 50°C
	Maximum pulling Tension	70N
	Minimum bending Radius	4D mm
	Nominal Mutual Capacitance @1KHz	5.1 nF /100m
	Maximum Capacitance Unbalance	330 pF /100m
	Maximum Delay @1KHz	570 ns /100m
	Maximum Delay Skew	45 ns /100m
	Maximum Conductor DC Resistance @20°C	9.38 Ω /100m
	Maximum DCR Unbalance @20°C	5%
	Maximum Operating Voltage(VRMS)	80V
	Characteristics Impedance	100 Ω

Electric Performance	Frequency MHz	Attenuation (dB/100m)	NEXT (dB)	Return Loss (dB)	ACR (dB)	Power Sum		
						NEXT (dB)	ELFEXT (dB/100m)	ACR (dB)
	1	2.0	74.3	20.0	72.3	72.3	63.8	70.3
	4	3.8	65.3	23.0	61.5	63.3	51.8	59.5
	8	5.3	60.8	24.5	55.4	58.8	45.7	53.4
	10	6.0	59.3	25.0	53.4	57.3	43.8	51.4
	16	7.6	56.2	25.0	48.7	54.2	39.7	46.7
	20	8.5	54.8	25.0	46.3	52.8	37.8	44.3
	25	9.6	53.3	24.3	43.8	51.3	35.8	41.8
	31.3	10.7	51.9	23.6	41.2	49.9	33.9	39.2
	62.5	15.4	47.4	21.5	32.0	45.4	27.9	30.0
	100	19.8	44.3	20.1	24.5	42.3	23.8	22.5
	155	25.2	41.5	18.8	16.3	39.5	20.0	14.3
	200	29.0	39.8	18.0	10.8	37.8	17.8	8.8
	250	32.9	38.3	17.3	5.5	36.3	15.8	3.5

Construction

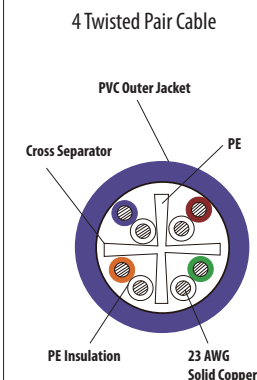

Pair Identification

Pair 1	Blue / White
Pair 2	Orange / White
Pair 3	Green / White
Pair 4	Brown / White



Specifications subject to change without notice.

EIGHT LIMITED

No.18, 4/F, Thriving Industrial Centre, 26-38 Sha Tsui Road, Tsuen Wan, N.T., Hong Kong
Tel: (852) 2413 2222 Fax: (852) 2411 3000 Email: info@eightgroup.com



Visit us at Website
<http://www.eightgroup.com>